

PA027_23 FHR reports

Validation of the HIC rain gauges data

Year 2020

DEPARTMENT MOBILITY & PUBLIC WORKS

Validation of the HIC rain gauges data

Year 2020

Journée, M.; Vandenbruwaene, W.; Deschamps, M.; Mostaert, F.





Legal notice

Flanders Hydraulics Research is of the opinion that the information and positions in this report are substantiated by the available data and knowledge at the time of writing.

The positions taken in this report are those of Flanders Hydraulics Research and do not reflect necessarily the opinion of the Government of Flanders or any of its institutions.

Flanders Hydraulics Research nor any person or company acting on behalf of Flanders Hydraulics Research is responsible for any loss or damage arising from the use of the information in this report.

Copyright and citation

© The Government of Flanders, Department of Mobility and Public Works, Flanders Hydraulics Research 2021 D/2021/3241/146

This publication should be cited as follows:

Journée, M.; Vandenbruwaene, W.; Deschamps, M.; Mostaert, F. (2021). Validation of the HIC rain gauges data: Year 2020. Version 2.0. FHR Reports, PA027_23. Flanders Hydraulics Research: Antwerp

Reproduction of and reference to this publication is authorised provided the source is acknowledged correctly.

Document identification

Customer:	Flanders Hydraulics Research Ref.: WL2021RPA027_23								
Keywords (3-5):	Rain gauges, monthly, yearly, validation								
Knowledge domains:	Waterbeheer > Hydrologie Waterbeheer > Permanentie Waterbeheer > Meetnetten								
Text (p.):	37		Appendi	ices (p.): /					
Confidential:	⊠ No	Available	online						

Author(s):	Journée, M. (RMI)
------------	-------------------

Control

	Name	Signature
Reviser(s):	Deschamps, M.	Getekend door:Meanten Deschamps (Big Getekend op:2021-0-3-24 16:15-64 +02:0 Redentik keur dit document goed <i>Heanne Dochamps</i>
Project leader:	Vandenbruwaene, W.	Getakend door/Woulder Vandenbruwwenne Getakend op 2021-00-14 10:30:552 +02:0 Reden: ik keur dit document goed

Approval

HIC manager:	Deschamps, M.	Getekend door:Meanten Deschamps (big Getekend op 2027-08-24 ft:161-15 +02:0 Reden: Ik keur dit document goed Maavre- Door/anya
Head of Division:	Mostaert, F. For the Head of Division, absent Patrik Peeters, Engineer, in charge with leading the Division Flanders Hydraulics Research	Getekend door:Stefan Geerts (Signature) Getekend op:2021-08-26 10:37:55 +02:0 Reden:lik keur dit document goed Srefan Geers



Abstract

This report summarizes the results of the validation of the data recorded during the year 2020 by 20 rain gauges operated by HIC. This validation is made by RMI and integrates two aspects. First, a human operator routinely monitors the data on successive periods of 24 hours. Issues detected on that daily timeframe are directly corrected. Second, monthly and annual values from the validated HIC data are compared against neighboring stations data as well as radar-derived rainfall estimates. Both validation aspects are treated in this report.

Report on the validation of the HIC rain gauges data of 2020

Michel Journée, Royal Meteorological Institute (RMI)

Abstract

This report summarizes the results of the validation of the data recorded during the year 2020 by 20 rain gauges operated by HIC. This validation is made by RMI and integrates two aspects. First, a human operator routinely monitors the data on successive periods of 24 hours. Issues detected on that daily timeframe are directly corrected. Second, monthly and annual values from the validated HIC data are compared against neighboring stations data as well as radar-derived rainfall estimates. Both validation aspects are treated in this report.

Contents

1	Introduction	3
2	Data validation method	5
3	Validation statistics	9
4	Comparative analysis against neighboring stations	11
5	Comparative analysis against radar data	13
6	Conclusion	15
	A.1 plu01a Aarschot 1 A.2 plu02a Bornem 1 A.3 plu03a Boortmeerbeek 2 A.4 plu04a Brugge 2 A.5 plu05a Denderleeuw 2 A.6 plu06a Elst 2 A.7 plu07a Genk 2 A.8 plu07b Genk 2 A.9 plu08a Kanne 2 A.10 plu09a Lo-Fintele 2	17 18 19 20 21 22 23 24 25 26 27
	A.12 plu11a Lot	28 29
	F	30 31

A.15	plu 14a	Sint-Laureins	5.			-	-	-	-							-	-	-		-	-	-	-	3	32
A.16	plu15a	Tienen																						3	33
A.17	plu16a	Vlamertinge																						3	34
A.18	plu17a	Zele																						3	35
A.19	plu18a	Zoutleeuw .																						3	36
A.20	plu19a	Zwevegem .																						3	37

1. Introduction

This report summarizes the results of the validation of the data recorded during the year 2020 by 20 rain gauges operated by HIC. This validation is made by RMI and integrates two aspects. First, a human operator routinely monitors the data on successive periods of 24 hours. Issues detected on that daily timeframe are directly corrected. Second, monthly and annual values from the validated HIC data are compared against neighboring stations data as well as radar-derived rainfall estimates. Both validation aspects are treated in this report: in Sections 2 and 3 for the routine daily validation and in Sections 4 and 5 for the comparisons at monthly and annual timescales. Rain gauges data from 2020 are finally summarized in annual precipitation totals in the Conclusion (Section 6, Figure 15).

Precipitation overview in 2020 in Belgium

The annual rainfall in 2020 in Uccle is with 731.9 mm around 14% below the 1981–2010 normal value (852.4 mm). This precipitation quantity is distributed on 169 precipitation days (normal value: 198.7 days), as shown in Figure 1, (left panel). The monthly precipitation values in Uccle are below the monthly normal values for 8 months, i.e., all months except February, March, September and October (Figure 1, right panel).

In the climatological stations located in the Flemish Region (around 80 stations), the annual total varies between 520 mm (in Lauw) and 980 mm (in Ingelmunster, Beerst and Brasschaat) and is in most places below the 1981–2010 normal values (Figure 2).

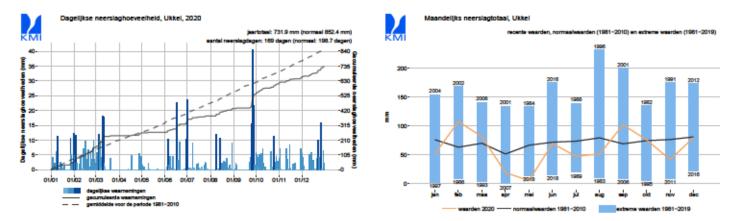


Figure 1: Daily and monthly precipitation values in Uccle in 2020.

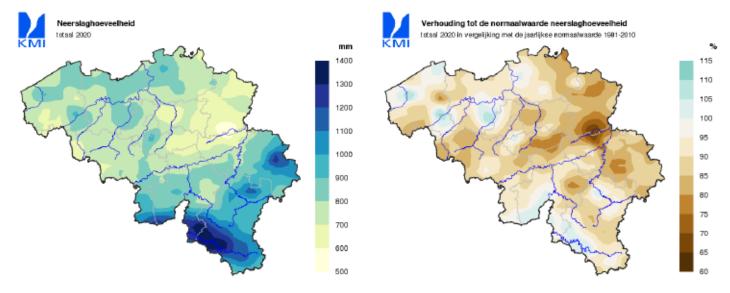


Figure 2: Map of the annual rainfall in Belgium in 2020 (left panel) and its deviation versus the 1981–2010 normal values (right panel). Local extremes are slightly smoothed in these maps.

HIC rain gauges data

The locations of the 20 HIC rain gauges validated for the year 2020 are listed in Table 1 and displayed on a map in Figure 3. The following changes have been made to some rain gauges in 2020:

- The rain gauge plu07a (Genk) has been closed in February 2020. The nearby rain gauge plu07b (Genk) is operational since August 2019.
- The rain gauge plu04a (Brugge) has been temporally closed in June 2020 because of construction works at the site.
- The rain gauge plu05a (Denderleeuw) has been closed in August 2020 because of construction works at the nearby weir. This rain gauge is replaced since February 2021 by a new rain gauge in Ninove (plu20a).

All rain gauges are weighing rain gauges of the manufacturer OTT. Precipitation quantities are recorded every 5-min with a resolution of 2 decimals.

ode	location	latitude	longitude	remark
lu01a	Aarschot	50.982	4.851	
lu02a	Bornem	51.108	4.239	
lu03a	Boortmeerbeek	50.991	4.579	
lu04a	Brugge	51.221	3.234	temporally closed in June 2
IOE -	Dandarlagunu	EO 074	4.077	alored in August 2020

Table 1: Code, name and location of the HIC rain gauges.

code	location	latitude	longitude	remark
plu01a	Aarschot	50.982	4.851	
plu02a	Bornem	51.108	4.239	
plu03a	Boortmeerbeek	50.991	4.579	
plu04a	Brugge	51.221	3.234	temporally closed in June 2020
plu05a	Denderleeuw	50.874	4.077	closed in August 2020
plu06a	Elst	50.812	3.739	
plu07a	Genk	50.927	5.513	closed in February 2020
plu07b	Genk	50.935	5.493	opened in August 2019
plu08a	Kanne	50.811	5.671	
plu09a	Lo-Fintele	50.958	2.736	
plu10a	Lommel	51.248	5.263	
plu11a	Lot	50.767	4.270	
plu12a	Ronse	50.739	3.554	
plu13a	Sint-Baafs-Vijve	50.914	3.416	
plu14a	Sint-Laureins	51.233	3.534	
plu15a	Tienen	50.790	4.914	
plu16a	Vlamertinge	50.844	2.811	
plu17a	Zele	51.046	4.047	
plu18a	Zoutleeuw	50.841	5.109	
plu19a	Zwevegem	50.824	3.345	

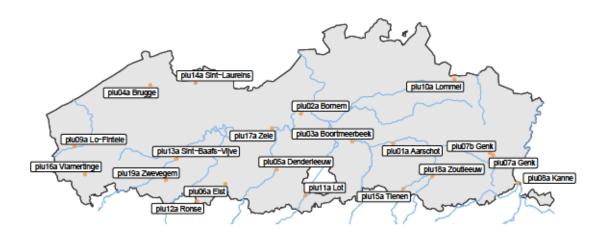


Figure 3: Location of the HIC rain gauges.

2. Data validation method

The Royal Meteorological Institute (RMI) is in charge of the validation of the 5-min timeseries of the HIC rain gauges since January 1, 2019.

RMI has a solid experience in meteorological data validation, and in particular in rain gauges data validation. Rain gauges observations in Belgium are verified routinely at RMI as an operational task. Each business day, an operator checks the latest rain gauges data with the help of

www.meteo.be 5 Update: July 2, 2021

data visualisation and manipulation tools. These tools are internally developped and accessible within a user-friendly interface named *PluvioControl*. The validation procedure is semi-automated in the sense that suspicious values are highlighted by this tool and proposed to the operator for further checks who takes the final decision to validate or to correct these values.

PluvioControl allows the operator to interact with observations from automatic rain gauges (5-min data) as well as manual rain gauges (daily precipitation totals). Till the end of 2018, RMI performed a routine validation of the rain gauges data recorded within the Belgian climatological network (around 200 stations), by 15 automatic rain gauges in RMI stations and by around 90 weighing rain gauges operated by the Walloon hydrological services. Since January 2019, rain gauges data from the HIC stations have been integrated in this routine validation.

Because the daily observations in the Belgian climatological network are made each morning at 08:00 (local time), the validation of both manual and automatic rain gauges is made on periods from 08:00 on a given day to 08:00 on the next day. In this way, daily totals from automatic rain gauges can be accordingly compared to daily values from manual rain gauges.

Each business day D, the data received since the previous validation period till 08:00 on day D are verified (i.e., on Mondays, data from Friday 08:00 till Monday 08:00 are typically verified, while on Tuesdays, the validation concerns the data from Monday 08:00 till Tuesday 08:00).

The following tools are available in PluvioControl to detect suspicious values:

- An overview provides various statistics about data availability.
- Interactive maps (based on the Google maps API) allows a spatial visualization of daily and hourly precipitation values (Figures 4 and 5). These values can be compared across the various observation networks. Overlays with radar accumulation products as well with cloud masks derived from Meteosat Second Generation data are also available.
- For each stations, time series plots compare hourly and daily values against corresponding values from neighboring stations (i.e., against an inverse distance weighing interpolation of the 5 closest stations) and radar data (Figure 6).
- A set of statistical plausibility tests performed at various timescales (5-min, 1-hour and daily data) enables to highlight suspicious cases.
- For each station, a spatial analysis lists the daily totals from the closest rain gauges. Data from the rain gauges operated by VMM are available in PluvioControl even if these data are not checked for inconsistencies.
- As snow can be an issue for precipitation observations (especially for the previous tipping bucket rain gauges), all available observations regarding snow (snowfall and snow depth) are centralized in a page of PluvioControl.

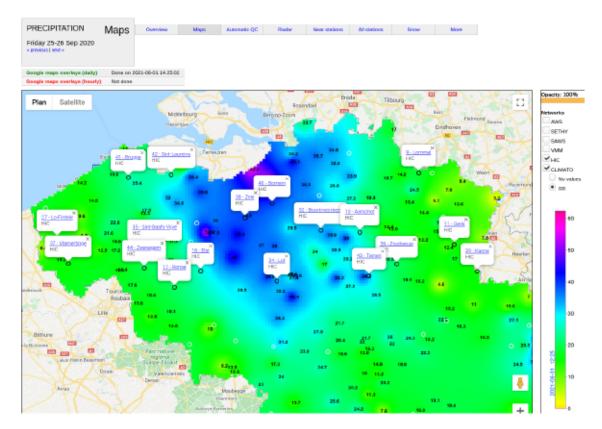


Figure 4: Data visualisation on maps in PluvioControl: comparison against daily observations of climatological stations (case of September 25, 2020). The background field is an interpolation of the daily values recorded in the HIC station while the numbers correspond to the observations of the climatological stations.

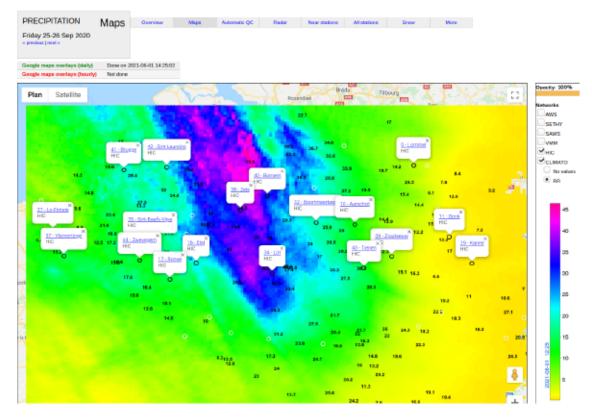


Figure 5: Data visualisation on maps in PluvioControl: comparison against daily radar data (case of September 25, 2020). The background field represents the estimations of the radar of Jabbeke. The numbers correspond to the observations of the climatological stations.

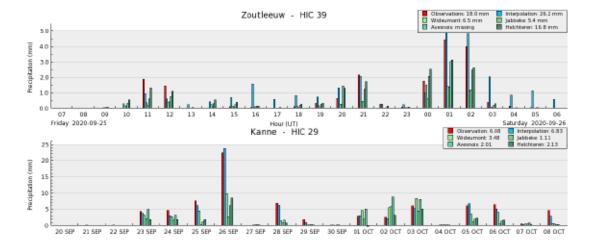


Figure 6: Comparison of hourly (top panel, case of September 25, 2020) and daily (bottom panel, illustration of a period of 20 days around October 1, 2020) data against an inverse distance weighing interpolation of neighboring stations and radar estimations.

With the help of these tools, the operator checks all suspicious cases one by one and corrects the data when necessary. Corrections can be applied directly on the 5-min data. Alternatively, corrections can also be set for hourly or daily totals and then automatically reported on the 5-min data. Missing data are systematically filled with estimations which are mostly based on neighboring stations data. The operator has however the possibility to use radar estimates instead,

which are is some cases more appropriate (e.g., case of small-scale convective precipitation). Once the suspicious values have all been checked, the remaining unverified data are considered as valid. Quality flags with value either 'valid', 'suspicious' or 'corrected' are attributed to each 5-min data.

3. Validation statistics

The 5-min time series of the 20 HIC rain gauges represent more than 2.10^6 values in 2020. The heat maps in Figures 7 and 8 provide some results regarding the validation of these time series. These plots illustrate for each station and month the amount of valid, missing/unfeasible, suspicious and erroneous data. Unfeasible 5-min data are those that are negative or larger than 50mm. Erroneous values are values between 0mm and 50mm that had to be corrected.

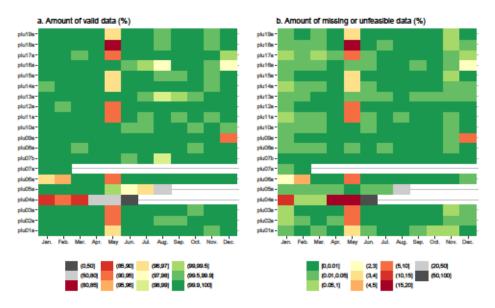


Figure 7: Illustration of the amount in % of valid and missing/unfeasible data per station and month. Unfeasible 5-min data are those with a negative value or a value larger than 50mm.

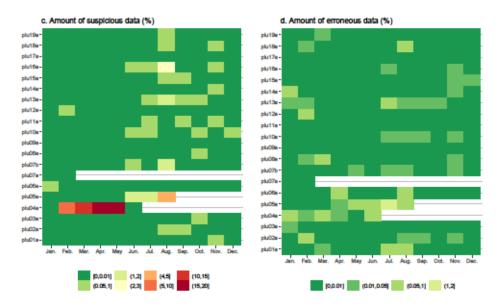


Figure 8: Illustration of the amount in % of suspicious and erroneous data per station and month. Erroneous values are those between 0mm and 50mm that had to be corrected.

The results in Figures 7 and 8 indicate that most of the data are considered as valid (i.e., 99.5% of the data when not considering plu04a, plu05a and plu07a that have been interrupted in 2020). The remaining 0.5% of data are mainly missing data for which estimations have been provided. A larger than usual fraction of missing data have been noted in May, and especially between 19 and 28 May because of problems with the dataloggers (Figure 9). Suspicious data are quite rare and correspond to small non-zero precipitation values recorded during dry periods (according to both neighboring station and radar data), i.e., so-called phantom precipitations. Erroneous data are also rare and are of 2 types: small non-zero precipitation values during dry period (phantom precipitations) or excessively large values confirmed neither by neighboring stations not by radar data. Phantom precipitations are a well-know potential issue of OTT rain gauges (depending on the firmware version) but are not really of concern for the HIC network as this problem occurs infrequently.

The series plu04a (Brugge) and plu05a (Denderleeuw) that have been closed in 2020 have been filled with estimations based on neighboring stations till the end of 2020.



Figure 9: Illustration of the amount in % of missing data per station and day in May 2020.

4. Comparative analysis against neighboring stations

In this section, the validated data of the HIC rain gauges are compared against data from neighboring rain gauges. For each HIC station, the 4 closest stations with complete and validated time series in 2020 are considered. These neighboring stations are either RMI stations (manual or weighing rain gauges) or OTT weighing rain gauges of the Walloon hydrological services.

When comparing observations from different sensors and location, it is important to keep in mind the recommendations of the World Meteorological Organization (WMO). The WMO defines for all meteorological measurements an achievable measurement uncertainty which is "based on sensor performance under nominal and recommended exposure that can be achieved in operational practice. It should be regarded as a practical aid to users in defining achievable and affordable requirements" (WMO, 2018). In the case of precipitations, the recommended achievable measurement uncertainty is "the larger of 5% or 0.1 mm".

In Figure 10, annual totals derived from the validated 5-min time series of the 20 rain gauges are compared against annual totals from neighboring stations. The blue errorbar displays deviation of ±5% around the annual total of the HIC stations in order to highlight the WMO recommended achievable measurement uncertainty.

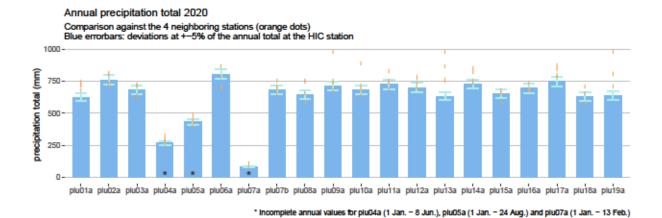


Figure 10: Comparison of the annual total of the HIC stations against the corresponding values of the 4 closest rain gauges (orange dots).

For most HIC stations, there are values of neighboring stations within the ±5% range around the annual total. For the other stations, a comparison of the monthly and daily values against the closest stations (see Appendix A) does however not highlight any specific issue. The largest discrepancies with the neighboring stations mostly result from small-scale intense convective precipitation events inducing significant differences in daily precipitations for some specific days.

The annual number of precipitation days based on 4 threshold values (i.e., number of days with at least 0.1, 1, 5 and 10 mm precipitation) are compared in Figure 11 against corresponding values of the 4 neighboring stations. Regarding the lowest threshold at 0.1mm, the number of precipitation days in the HIC stations matches well with those in neighboring stations. For the other thresholds, the values in the HIC stations are either within or below the range of those in neighboring stations. A station-wise comparison of the monthly number of precipitation days is provided in the Appendix A. These graphs do however not highlight any specific issue.

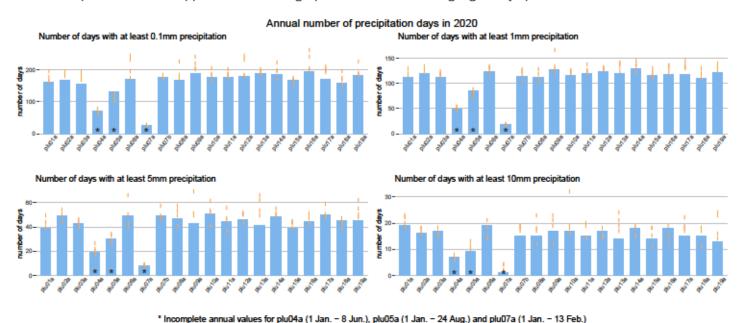


Figure 11: Comparison of the annual number of days with at least 0.1, 1, 5 or 10mm rainfall in the HIC stations against corresponding values of the 4 closest rain gauges (orange dots).

More detailed comparison results against the 4 closest stations are provided in the Appendix A for each HIC station.

Comparative analysis against radar data

In this section, the validated data of the HIC rain gauges are compared against radar-derived ground rainfall data. Annual and monthly radar-based precipitation totals are derived for the 20 locations of the HIC rain gauges from the daily composite RADQPE radar product (Goudenhoofdt, 2019).

This RADQPE product results from an advanced processing of the 3D radar reflectivity measurements including beam blockage correction, mitigation of non-meteorological echoes, precipitation classification and correction for the vertical profile of reflectivity. The rain rates are accumulated over a given duration by taking into account the movement of precipitation. The estimates are then adjusted to rain gauge measurements using a single bias correction. Estimations from single radars are combined into a composite using a distance-weighted scheme for the cold months and by taking the maximum value for the warm months. The composite product considered in the comparisons below integrates data from the radars of Wideumont, Jabbeke and Avesnois. The average radar bias is estimated based on the automatic rain gauges operated by RMI, SPW and VMM.

The annual total of the HIC rain gauges are compared against corresponding radar-derived values in Figure 12. The annual radar-based values often overestimate the ground observation. This overestimation is however less marked than in the similar analysis provided in the previous validation report (i.e., data 2019). In spite of this overestimation, the radar-derived values reproduce quite well the station-wise variability of the observed annual totals at the HIC stations (Figure 12).

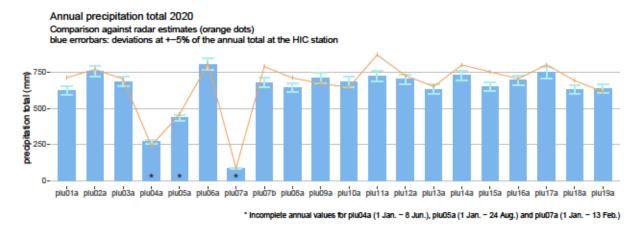


Figure 12: Comparison of the annual total of the HIC stations against radar-derived estimates.

Similar comparisons for monthly precipitation totals are provided in Figures 13 (bar plots per stations) and 14 (scatter plots per month). The analysis of the monthly values highlights a rather good match between rain gauges and radar estimations in January to May as well as November and December for all stations. Large radar overestimations are observed in the summer months (June to August), while radar underestimations can be noted for September.

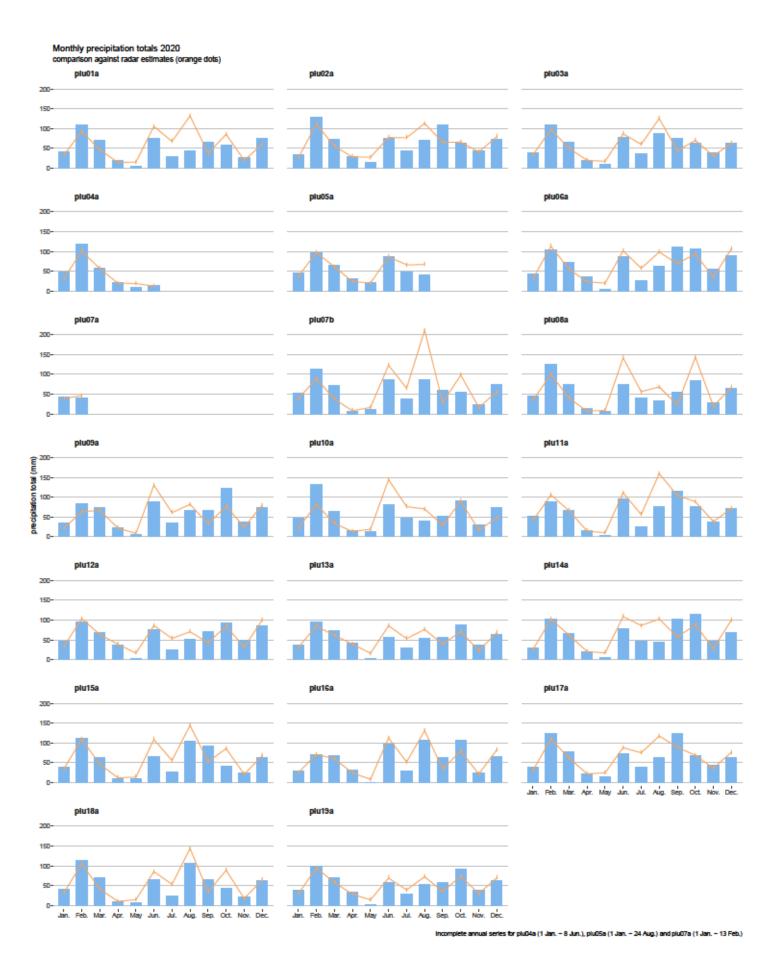


Figure 13: Comparison of the monthly totals of the HIC stations against radar-derived estimates.

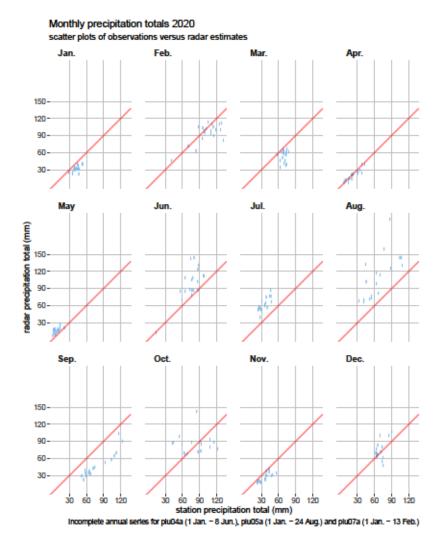


Figure 14: Scatter plots of the monthly totals of the HIC stations versus radar-derived estimates.

In spite of the limitations inherent to remote sensing observations, the radar data allows to compare the various rain gauges against a same reference. These analyses do not highlight specific outliers in the monthly and annual values of the HIC stations.

6. Conclusion

The routine daily validation of the data of the 20 HIC rain gauges indicates that most values are valid and corrections mainly concern missing values. Erroneous values are infrequent and either related to small non-zero values in dry periods (i.e., phantom precipitations) or excessively large values.

The daily validation enables to highlight and correct issues that can be detected when analyzing 24 hours of data. Issues such as small but persistent biases or drifts need however longer time frames to be detected. It is therefore useful to complement the routine daily validation with a comparative analysis of monthly and annual values.

This report therefore also summarizes comparative results of monthly and annual values derived from the validated HIC data against neighboring stations data as well as radar-derived rainfall

estimates. These validations did not highlight specific issues in the HIC data. When comparing the HIC data against neighboring stations data in terms of monthly and annual precipitation totals or precipitation days, it appears that the HIC values are either within the range of neighboring stations or below this range, but rarely above it. A slight under estimation for some HIC rain gauges is thus possible but difficult to assess. Rain gauges data from 2020 are summarized in annual precipitation totals in Figure 15.

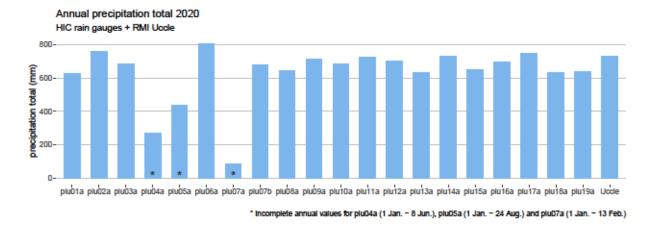


Figure 15: Annual precipitation total in the HIC stations and in the RMI station in Uccle.

Finally, in addition to the measurement uncertainty related to the sensor performance, there are uncertainties related to the influence of the close environment of the rain gauge on the measurements. In this context, WMO defines a siting classification (WMO, 2018b). RMI automatic rain gauges are classified either as "Class 1" (i.e., reference site) or "Class 2" (i.e., additional estimated uncertainty added by siting up to 5%). For sites of "Class 3", "Class 4" or "Class 5", an additional estimated uncertainty added by siting has to been into account that ranges up to 15%, 25% or 100%, respectively.

References

Edouard Goudenhoofdt, 2019. RADQPE User Guide, Royal Meteorological Institute of Belgium.

World Meteorological Organization (WMO), 2018. Operational Measurement Uncertainty Requirements and Instrument Performance. Annex 1.E. of the guide to meteorological instruments and methods of observation (CIMO guide). Geneva, Switzerland: Secretariat of the World Meteorological Organization. WMO No. 8.


World Meteorological Organization (WMO), 2018b. Siting Classifications for Surface Observing Stations on Land. Annex 1.B of the guide to meteorological instruments and methods of observation (CIMO guide). Geneva, Switzerland: Secretariat of the World Meteorological Organization. WMO No. 8.


A. Comparative analysis against neighboring stations: results per HIC station

This appendix provides detailed comparison results of the validated data of the HIC rain gauges against data from the 4 closest stations with complete and validated time series in 2020. These neighboring stations are either RMI stations (manual or automatic) or weighing rain gauges from the Walloon hydrological services (SPW). For each station, 4 or 5 types of graphs are provided:


- cumulative precipitation plots,
- bar plots of monthly totals,
- scatter plots of daily values,
- bar plots of the monthly number of days with 0.1, 1, 5 and 10mm precipitation (orange dots represent corresponding values of the 4 neighboring stations).
- bar plots with annual values compared to the estimated 1991-2020 normal (not for plu07a/b)

A.1. plu01a Aarschot

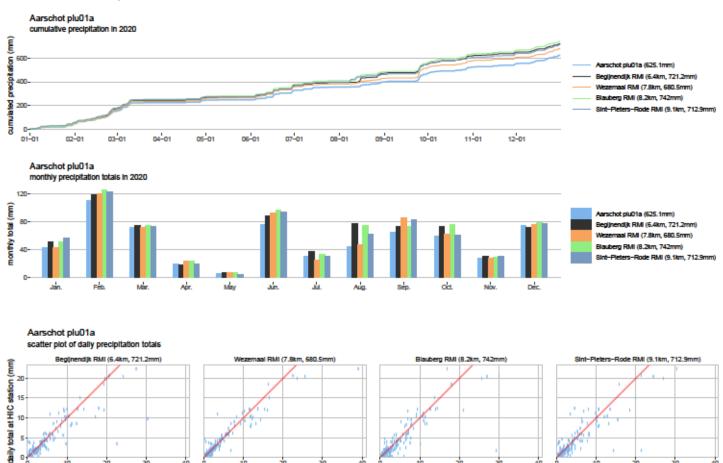


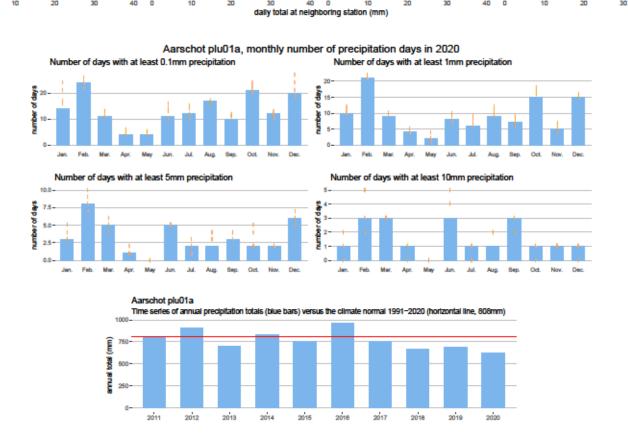


A.2. plu02a Bornem

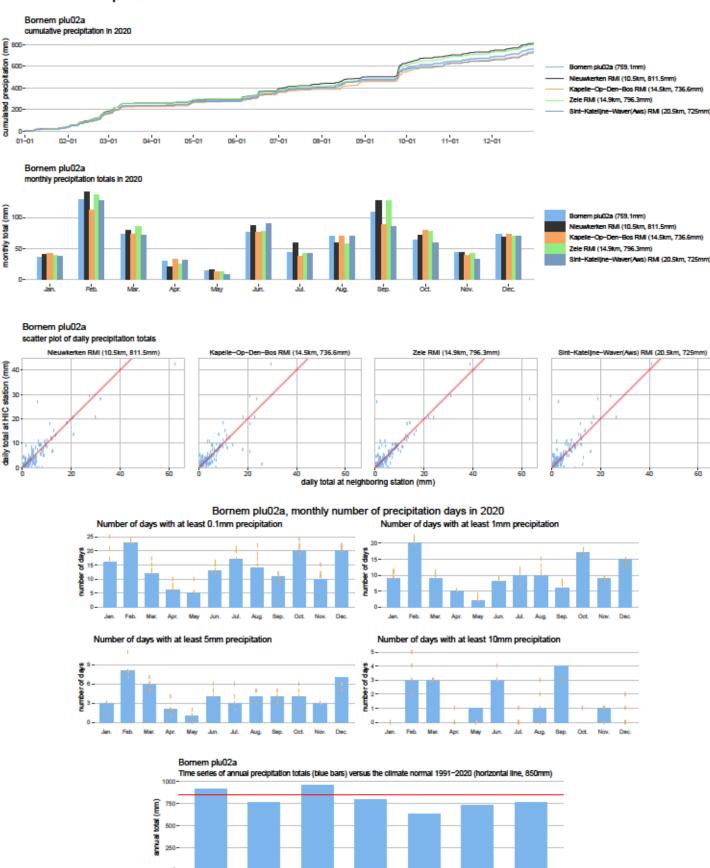



A.3. plu03a Boortmeerbeek

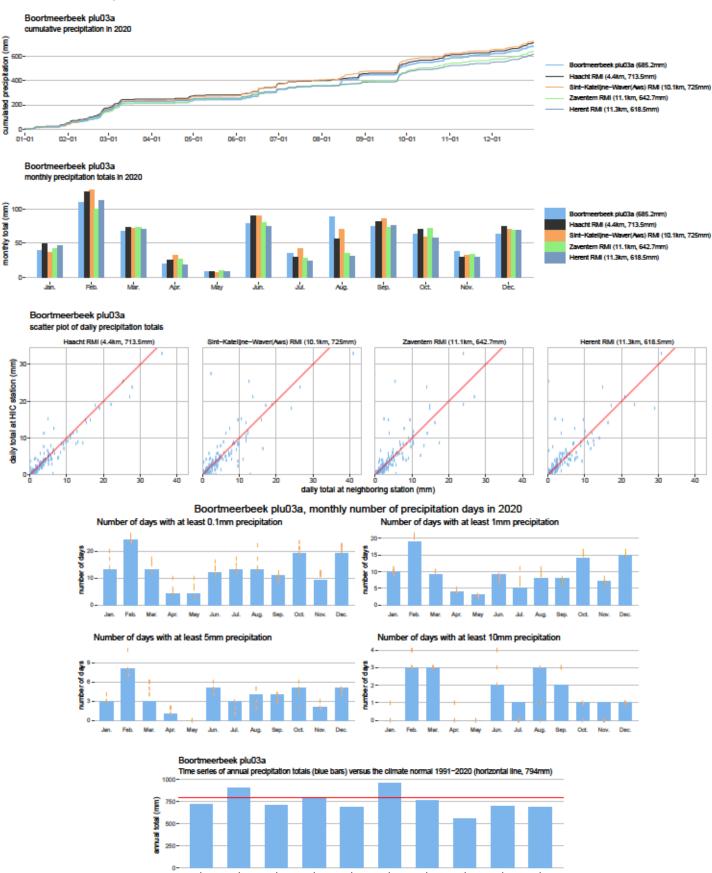


A.4. plu04a Brugge

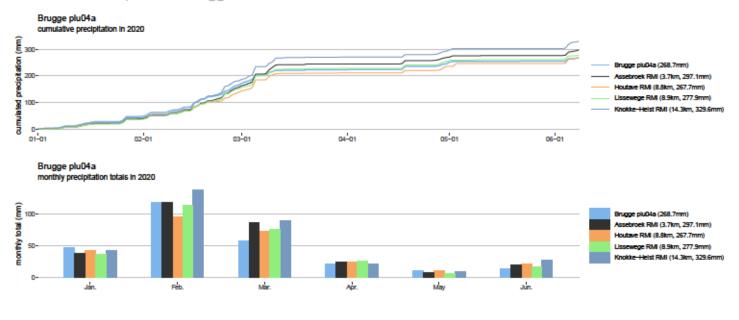


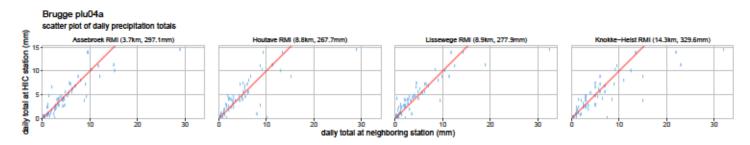

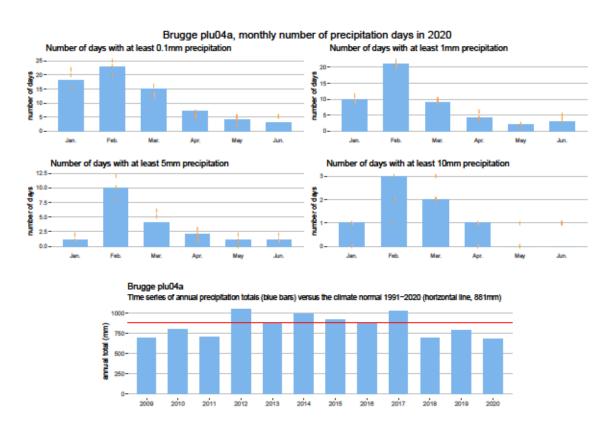


A.5. plu05a Denderleeuw

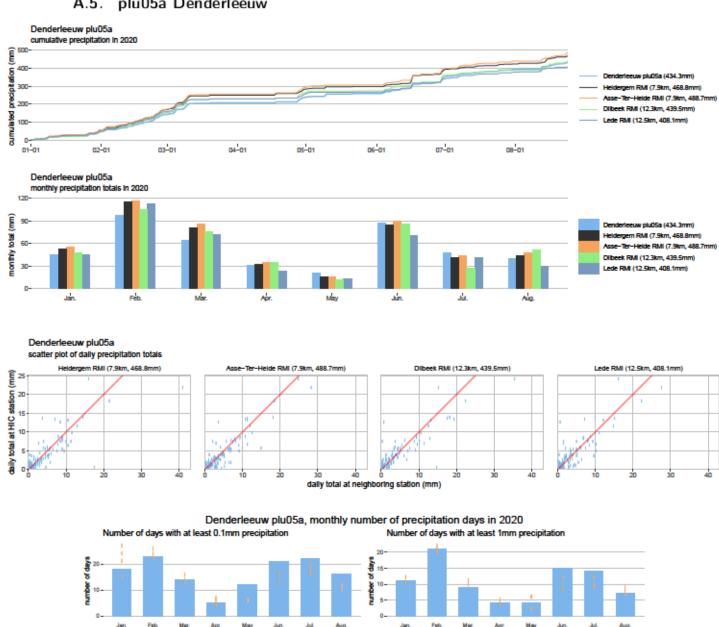


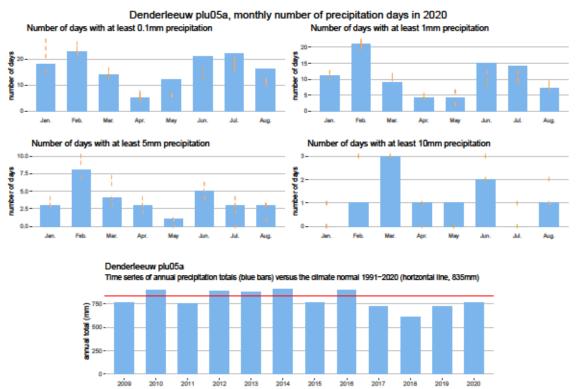



A.6. plu06a Elst

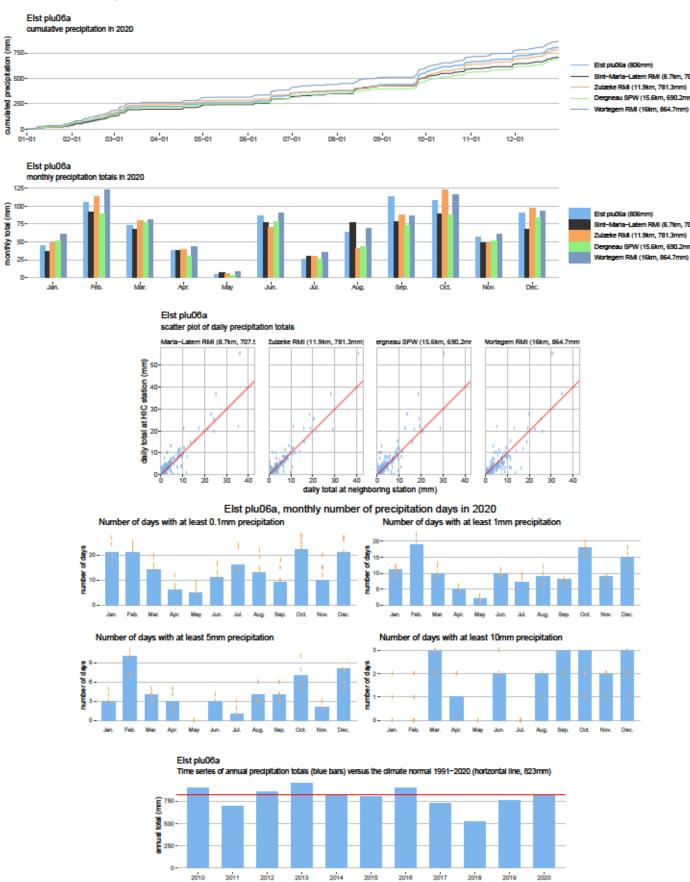


A.7. plu07a Genk

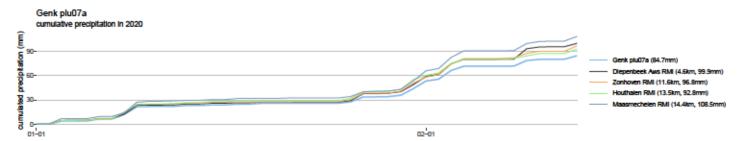


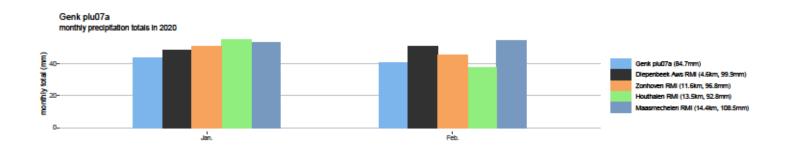


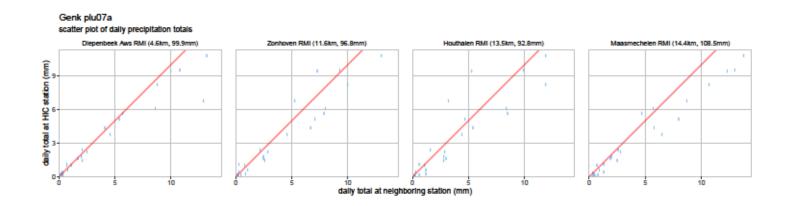


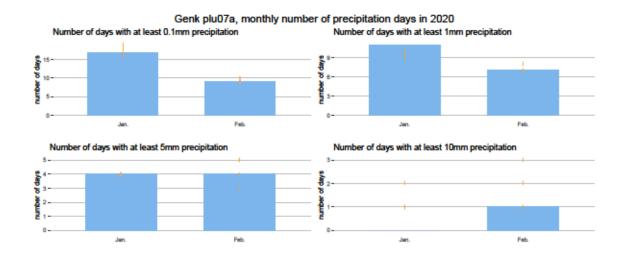


A.8. plu07b Genk

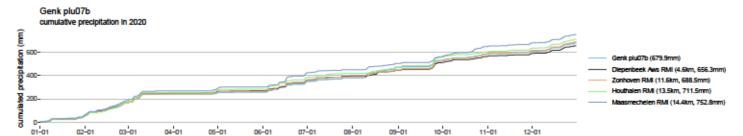


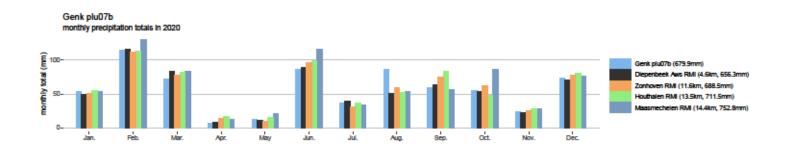

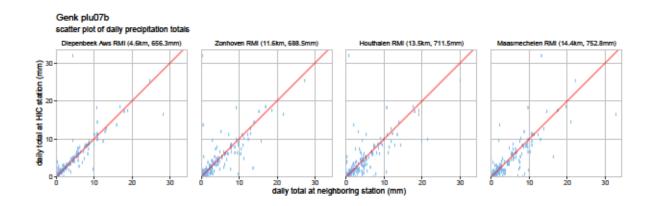


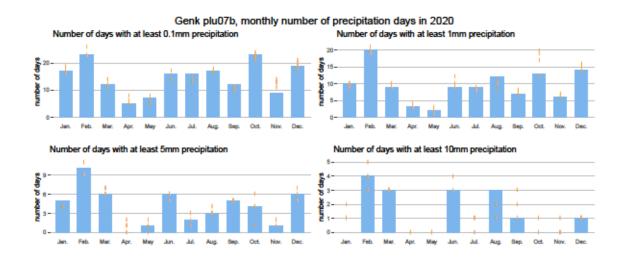


A.9. plu08a Kanne

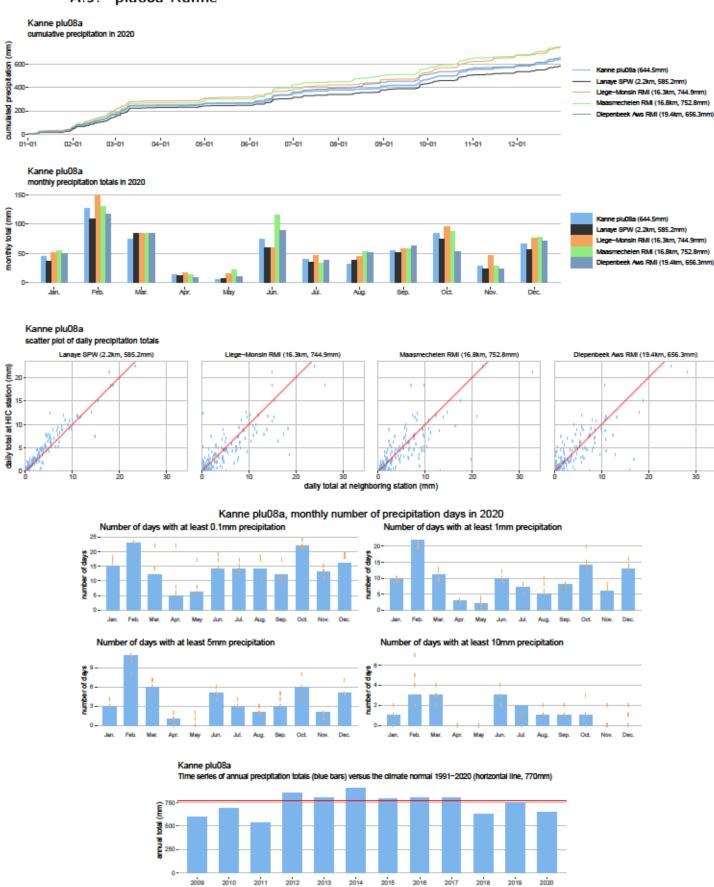

A.10. plu09a Lo-Fintele

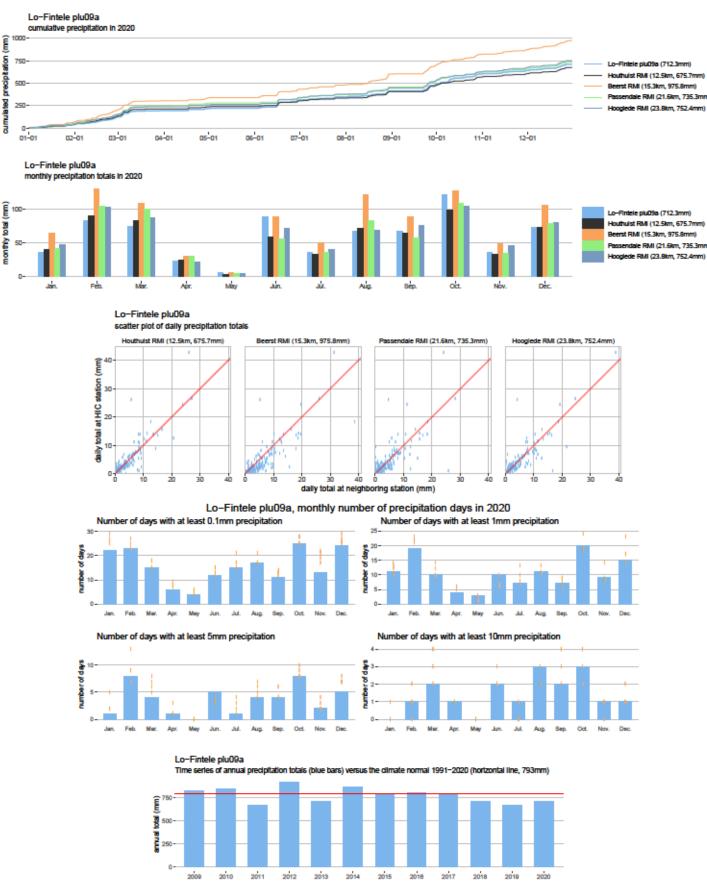


A.11. plu10a Lommel

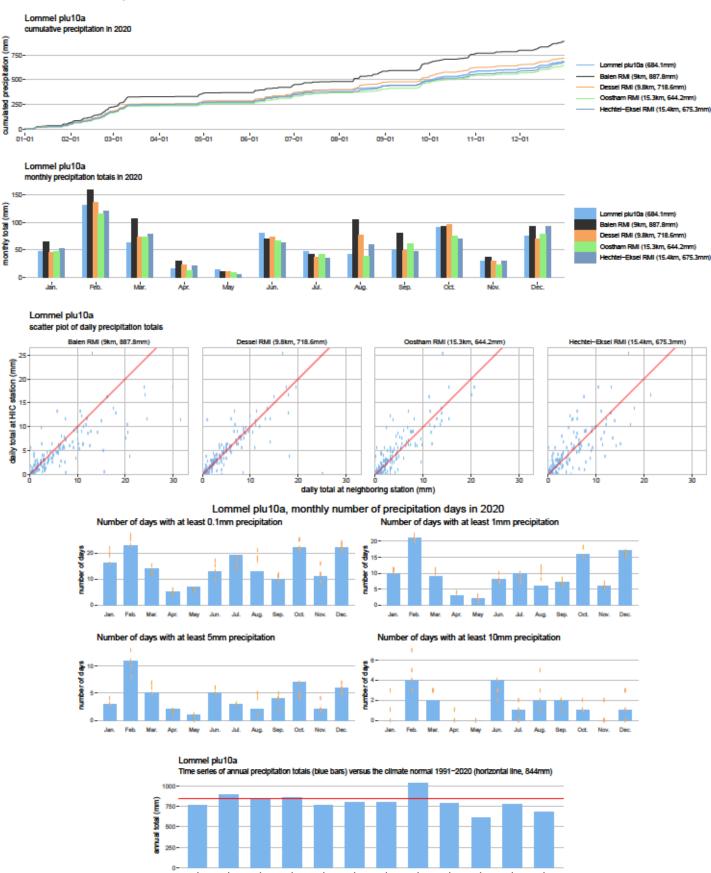

A.12. plu11a Lot





A.13. plu12a Ronse

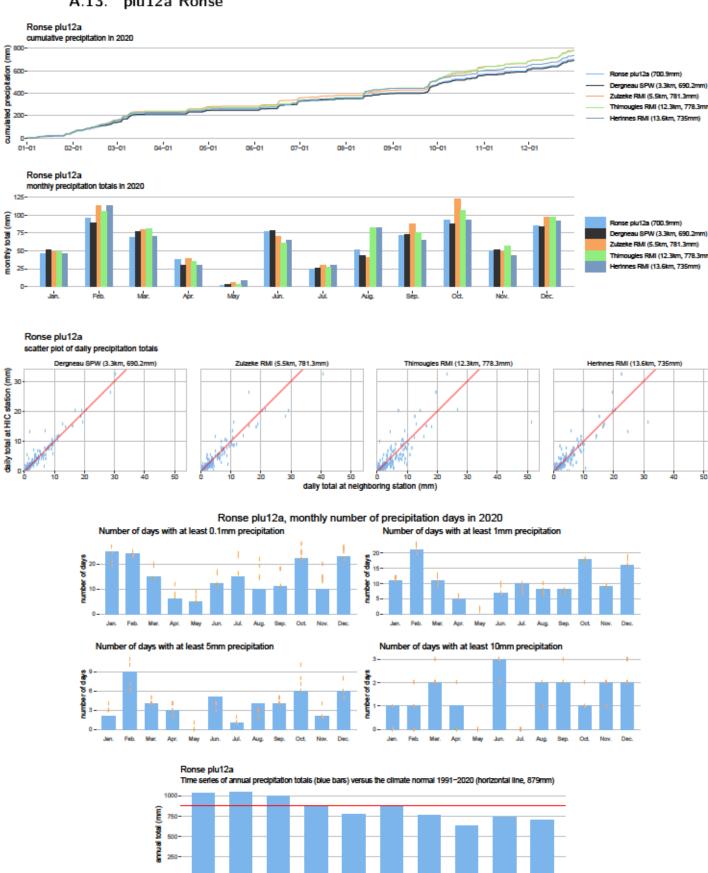


2014


A.14. plu13a Sint-Baafs-Vijve

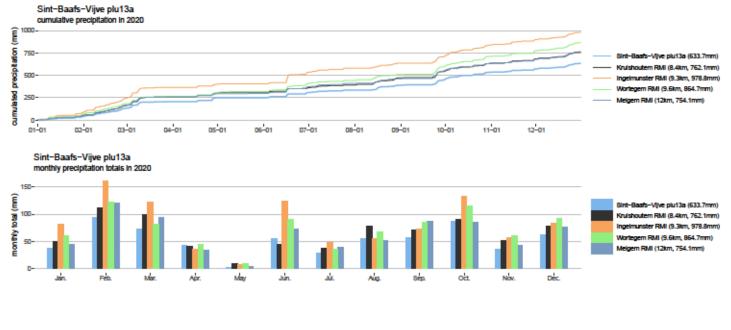

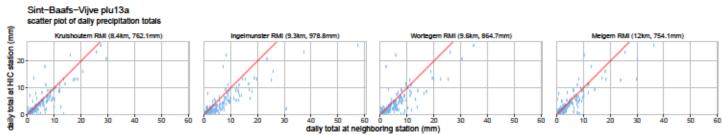


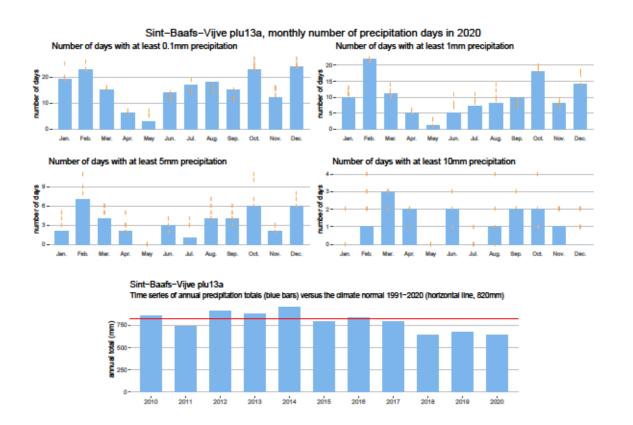


A.15. plu14a Sint-Laureins

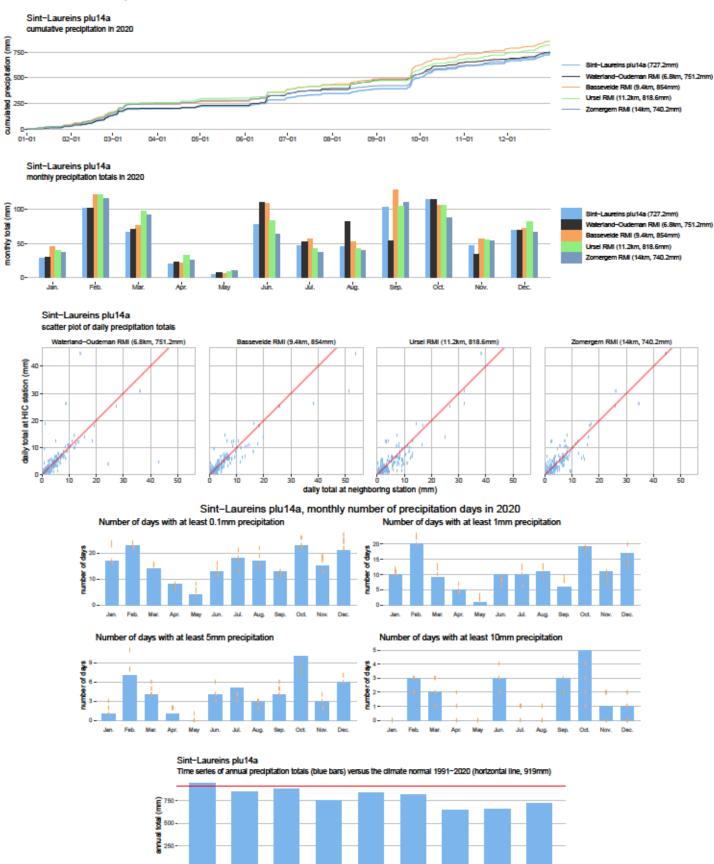


A.16. plu15a Tienen

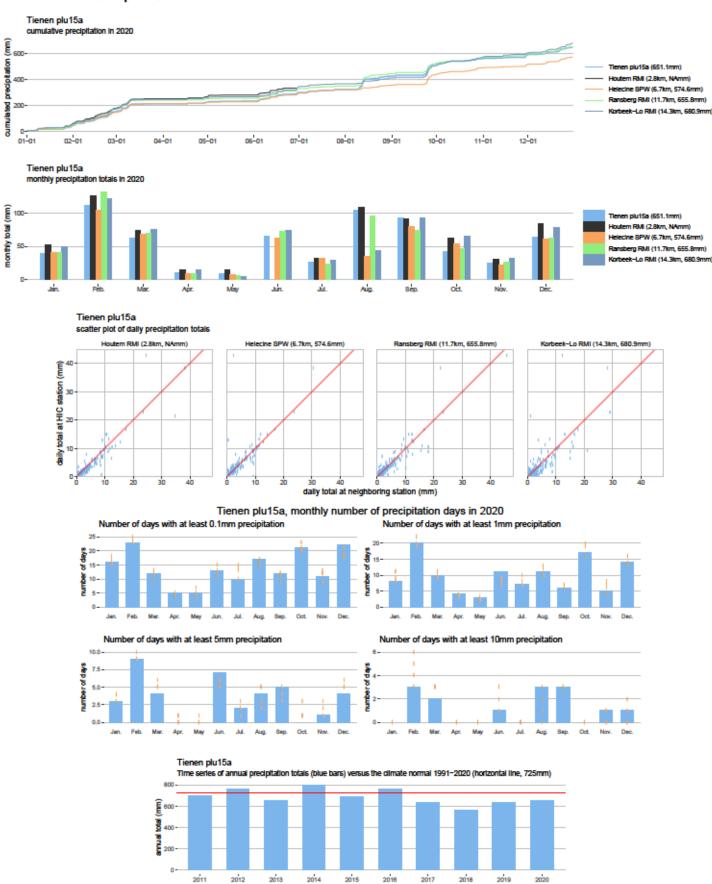


A.17. plu16a Vlamertinge

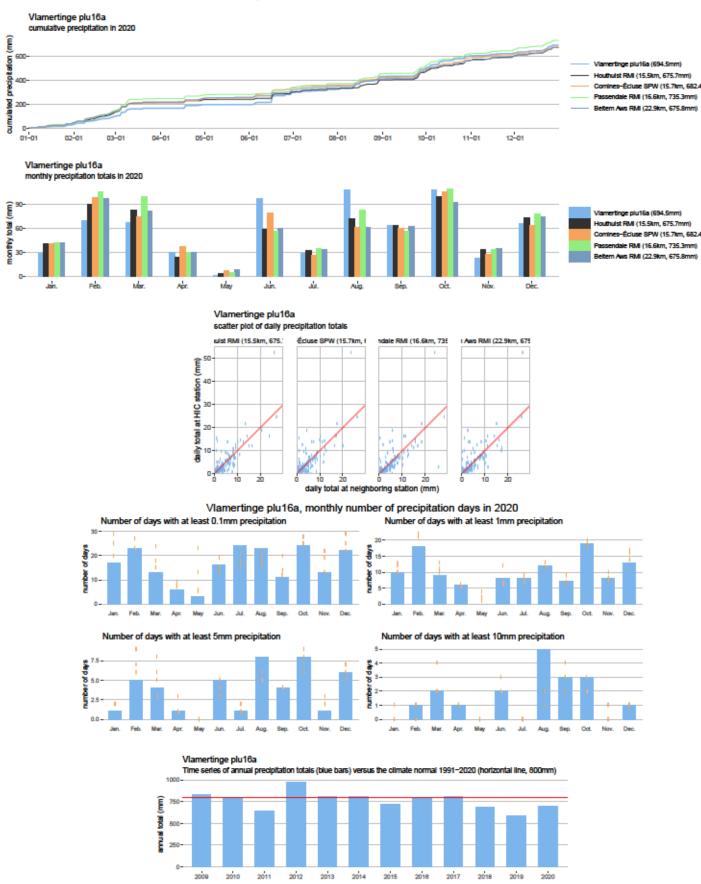

A.18. plu17a Zele

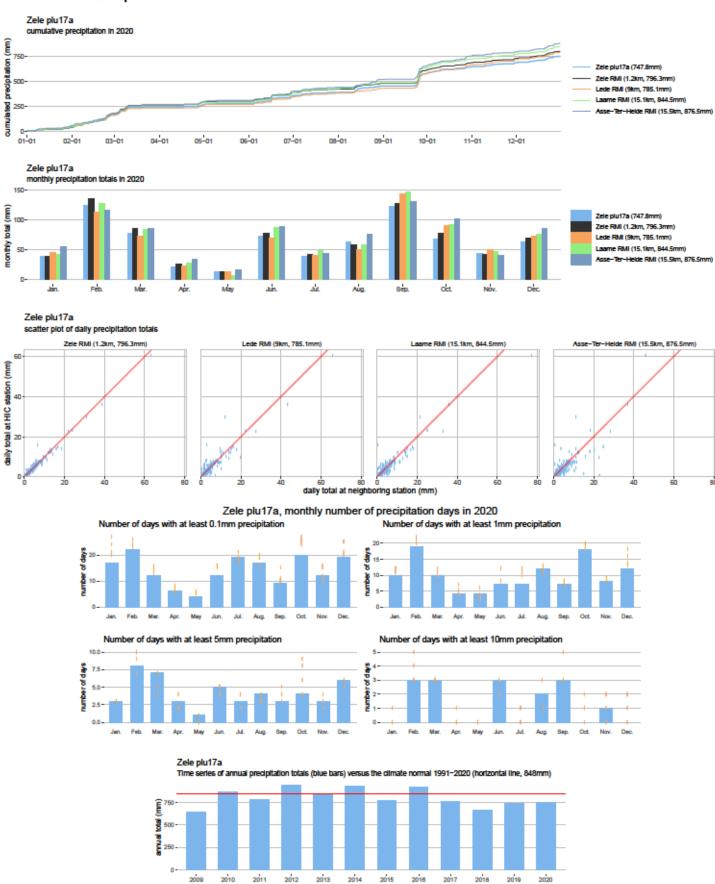



A.19. plu18a Zoutleeuw

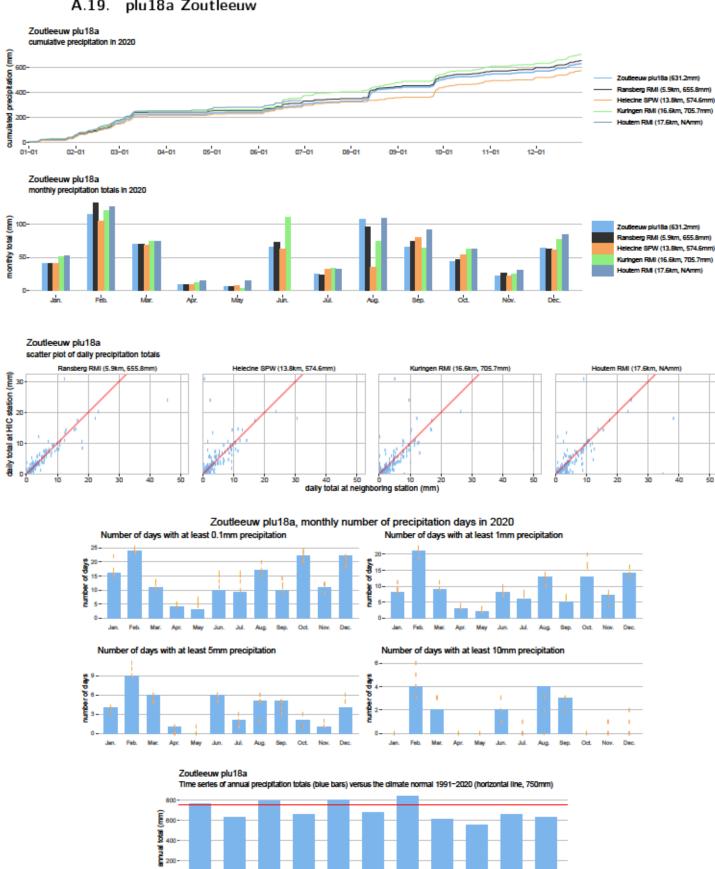


2017

A.20. plu19a Zwevegem

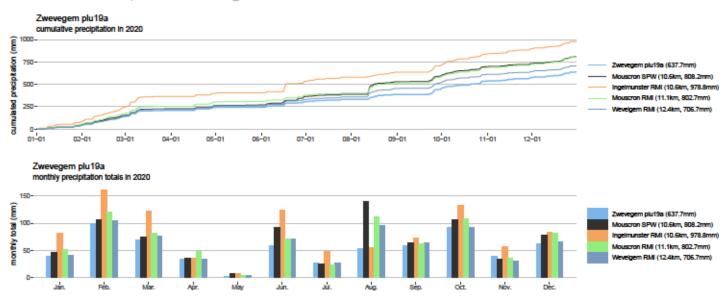

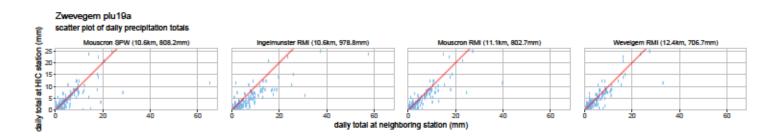

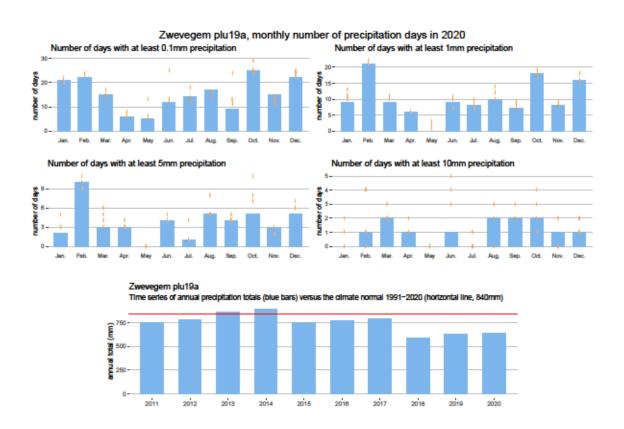

DEPARTMENT **MOBILITY & PUBLIC WORKS** Flanders hydraulics Research

Berchemlei 115, 2140 Antwerp T +32 (0)3 224 60 35 F +32 (0)3 224 60 36 waterbouwkundiglabo@vlaanderen.be www.flandershydraulicsresearch.be